





# PW 335 ND

800 Watt max | 8 Ω | Ø 320 mm / 12"



Potenza nominale	<b>400 W</b>	Re	<b>6,10 Ω</b>	D	<b>260 mm</b>
Impedenza nominale	<b>8 Ω</b>	Fs	<b>55 Hz</b>	Vas	<b>66,42 dm<sup>3</sup></b>
Sensibilità (1W/1m)	<b>100 dB</b>	Qms	<b>11,36</b>	Bxl	<b>21,36 Wb/m</b>
Ø bobina mobile	<b>75 mm</b>	Qes	<b>0,23</b>	Xmax	<b>6,5 mm</b>
Altezza traferro	<b>10 mm</b>	Qts	<b>0,22</b>	$\eta_c$	<b>4,68 %</b>
Fori di fissaggio	<b>8 <sup>Ø7</sup> / Ø 295</b>	Mms	<b>49,50 g</b>	Le	<b>0,54 mH</b>
Foro pannello	<b>282 mm</b>	Cms	<b>0,17 mm/N</b>	Peso	<b>5,00 Kg</b>

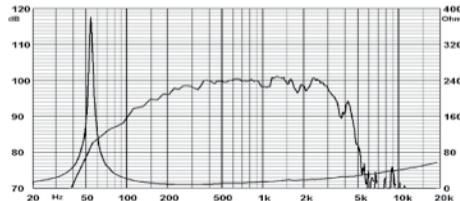

## WOOFER

Membrana in cellulosa trattata, sospensione NOMEX® doppia onda, bobina KAPTON®, filo d'alluminio, magnete Neodimio  
 Doped paper cone, NOMEX® surround two waves, KAPTON® voice coil former, aluminium wire, Neodymium magnet assembly

