




5" Ceramic Woofer

| | |
|------------------------|--------------|
| Program Power | 150 W |
| Rated impedance | 8 Ohm |
| Nominal diameter | 5" - 130 mm |
| Sensitivity (2,83V/1m) | 89 dB |
| Voice coil diameter | 1 in - 25 mm |
| Frequency Range | 45-10.000 Hz |


SPECIFICATIONS

| | |
|-------------------------------------|--------------------------|
| Nominal Diameter | 5" - 130 mm |
| Rated Impedance | 8 Ohm |
| Nominal Power Handling ¹ | 75 W |
| Program Power ² | 150 W |
| Sensitivity ³ | 89 dB |
| Frequency Range ⁴ | 45-10.000 Hz |
| Minimum Impedance | - |
| Basket Material | Steel |
| Magnet Material | Ferrite + Neo |
| Cone Material | Doped cellulose fiber |
| Cone Shape | Exponential |
| Surround | Rubber |
| Suspension | Fabric |
| Voice Coil Diameter | 1 in - 25 mm |
| Voice Coil Winding Material | Copper |
| Voice Coil Length | 10,5 mm - 0,41 in |
| Voice Coil Former Material | Kapton |
| Connection type | Faston |
| Ferofluid | No |
| Magnetic Gap Height | 6 mm - 0,24 in |
| Max. Peak to Peak Excursion | - |
| Efficiency Bandwidth Product EBP | 115 |
| Recommended Loading | Sealed box |
| Volume / Tuning frequency | 50 Lt (dm ³) |
| Maximum recommended frequency | - |

FREQUENCY RESPONSE CURVE ⁶

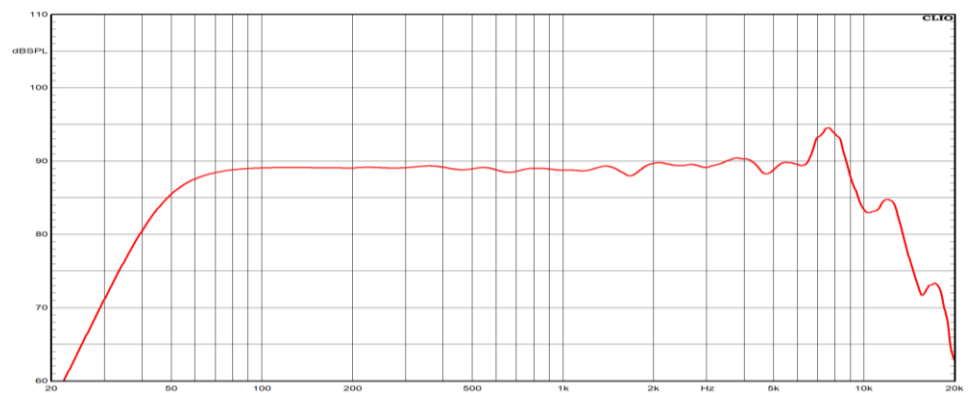

FREE AIR IMPEDANCE CURVE ⁷

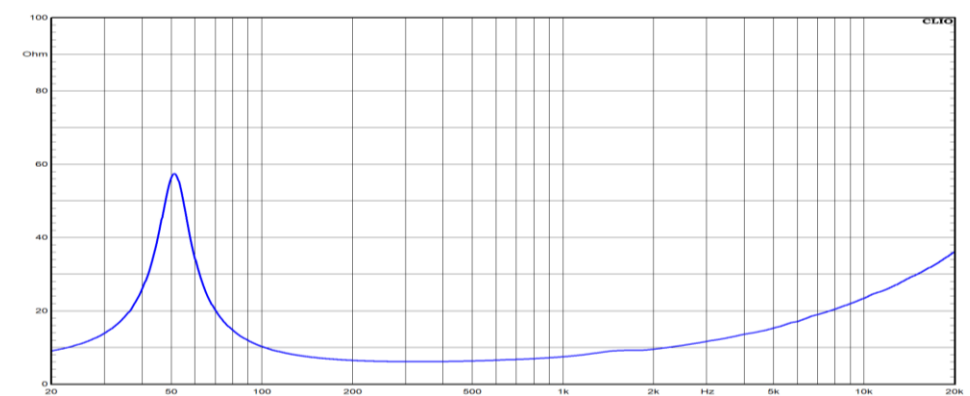

T/S PARAMETERS

8 Ohm

| | | |
|------------------------------------|------|---------------------------------------|
| Resonance frequency | Fs | 53 Hz |
| DC Resistance | Re | 5,7 Ohm |
| Mechanical Q Factor | Qms | 6,78 |
| Electrical Q Factor | Qes | 0,46 |
| Total Q Factor | Qts | 0,43 |
| BI Factor | BI | 5,8 Tm |
| Effective Moving Mass | Mms | 8,1 g |
| Equivalent Cas air loaded | Vas | 11,2 Lt (dm ³) - 0,4 cuft |
| Suspension Compliance | Cms | 1,1 mm/N |
| Effective Piston Diameter | D | 105 mm - 4,13 in |
| Effective piston area | Sd | 87 cm ² - 13,49 sq in |
| Max. Linear Excursion ⁵ | Xmax | 4 mm - 0,16 in |
| Voice Coil Inductance @ 1kHz | Le | 0,5 mH |
| Half-space Efficiency | η0 | 0,36 % |

MOUNTING AND SHIPPING INFORMATION

| | |
|----------------------------------|----------------------|
| Overall Diameter | 144,5 mm - 5,69 in |
| Baffle Cutout Diameter | 115 mm - 4,53 in |
| Flange and Gasket Thickness | 4,5 mm - 0,18 in |
| Total Depth | 71 mm - 2,8 in |
| Bolt Circle Diameter | 135,5 mm - 5,33 in |
| Bolt Holes Quantity and Diameter | 4 / 4,5 mm - 0,22 in |
| Net Weight | 1,05 Kg - 2,31 lb |
| Shipping Units | 6 Pcs |

NOTES

- ¹ Nominal power is determined according to AES2-1984 (r2003) standard.
- ² Program Power is defined as 3 dB greater than the Nominal rating.
- ³ Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
- ⁴ Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- ⁵ Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
- ⁶ Frequency response curve is measured on infinite baffle conditions.
- ⁷ Impedance curve is measured in free air conditions at small signals.